




A . Features

- ★ 13 Digits, Hour ,Minutes ,Seconds ,Month,Day and Week
- ★ Daily Alarm Chime hourly and Snooze Function
- ★ 12 / 24H format selectable,Auto Calendar
- ★ 1/100 second Chronograph with split functions
- ★ Count Down (Upper limit : 24H)
- ★ Dual Time
- ★ EL backlight

B . Operational Manual

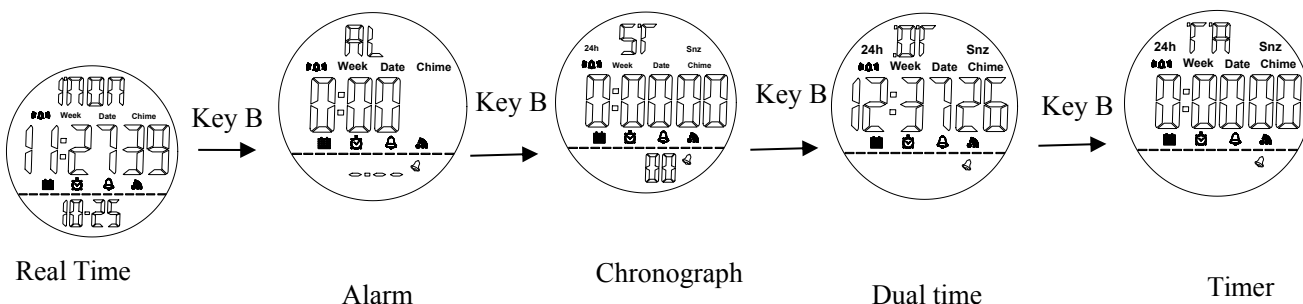


1. At any state ,press A key EL backlight for 3s .

2. Real Time

- ★ Time Setting

a)Press and hold C key for 2s to time setting state and "Second" flashing, press D key to zero; Press B key to select item as following sequence :

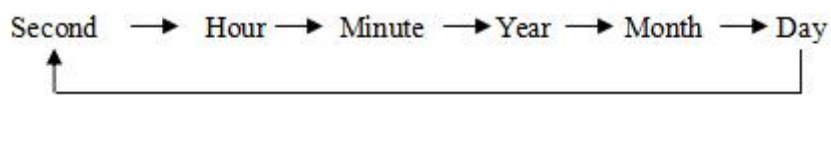

b).Press D key to adjust the flashing item,

c).Press C key to return to Real Time Mode.

d). Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes .In the range of 00 to 59 resets them to 00 and adds to the minutes. In the range of 00 to 29,the minutes are unchanged.

e) 12/24-Hour format :In the timekeeping Mode, Use D to toggle between 12-hour (12H) and 24-hour (24H) timekeeping.

3.Daily Alarm

In Real Time Mode, press B key enter into Alarm Mode

Press C key to turn on/off Alarm(🔔) and Snooze(Snz)

- ★ Alarm setting

Press and hold C key for 2s to select "Hour" setting ; Press B key to select "Minute" setting; Press D

key to adjust the flashing item.

Hour —————> Minute

4.Chronograph

In Real Time Mode , press B key twice enter into Chronograph Mode

- ★ Press D key to Start/Stop running ;When stop, press C key to zero.
- ★ When running ,press C key to split Counting. Then press D key to exit split count ,and stop counting ;
When exit split count ,press C key to zero.

5.Dual Time

- ★ Dual Time setting

In Real Time mode , Press B key 3 times to enter Dual Time Mode, Press and hold C key for 2s to select " Hour " setting, Press B key to select " Minute " setting, Press D key to adjust the flashing item, Press C key again to finish setting ,and return to Dual Time displaying mode .

6.Timer Mode

- ★ In Real Time Mode,pres B key four times enter into Timer mode
- ★ Press D key to Start/Stop countdown
- ★ When stop the countdown,pres C key back to the first setting time
- ★ Timer alarm sounds for about 10s when counting down to 0:00:00.The timer is automatically reset to its starting value after the alarm stops.
- ★ Press C key 2s enter into countdown time setting
 - a).Press B key to adjust “Hour” and then “Minute”

Hour————> Minute

- b).Press D key to adjust the flashing item
- c).Press C key to confirm

