


# SKMEI 1667 Qibla Watch Operation Manual

## A. Features

1. Time display, hour, minute, second, day, month, week, religious month, religious day
2. 12/24 hour, Gregorian calendar, HIJRI calendar, city data
3. Qibla direction
4. Prayer time and name display
5. Alarm function
6. Stopwatch function
7. Language selection function
8. Summer time function (DST)
9. Volume adjustment function
10. Bookmark function
11. Backlight

## B. Watch buttons and LCD format

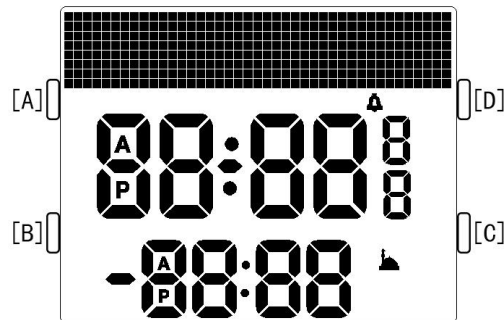

【A】 button:LIGHT/ -

【B】 button:SET

【C】 button:QIBLA

【D】 button:MODE/+

### C. Operation Manual

#### 1. Menu options



(Press D key to switch menu options in time display, press A key to switch back in other menu options screen)

Time display → HIJRI calendar display → next worship time (MAGRIB) → ISHA prayer time → FAJR prayer time → SHUROQ time → DHUHR prayer time → ASR prayer time → MAGRIB prayer time → QIBLA → SET TIME → SET SECONDS → CITY SELECT → LANGUAGE SELECT → GREGORIAN/HIJRI CALENDAR DISPLAY → TIME DISPLAY → AZAN DISPLAY → TAQWEEN → AZAN SAFETY → DST SELECT → ALARM → STOP-W → VOLUME → Bookmark → SHORT CUT → Electricity

**Remarks:** The sequence of worship time according to the time of next prayer time changing. As shown, if the next worship time is MAGRIB, then the watch display interface is ISHA time → FAJR time → SHUROQ time → DHUHR time → ASR time → MAGRIB time

### (1) Time Display:



#### Button function:


Press **【A】** key: Turn on the backlight

Press **【B】** key: Short press invalid, long press 2s to enter the setting mode

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to switch the menu options, long press for 2s to switch quickly

#### Setting mode:

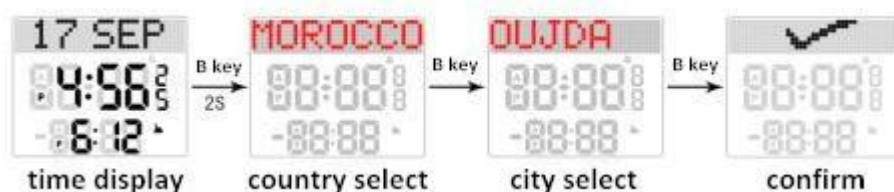

#### Button function:

Press **【A】** key: Short press to select country / city name, long press 2s to select country / city name quickly

Press **【B】** key: Switch settings

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to select country / city name, long press 2s to select country / city name quickly

Noted: Switch to the last item and press the B key to exit the setting mode, and it display " ✓ " when exiting

### (2) HIJRI date:

Press **【D】** key to enter the calendar interface, then press **【B】** key for 2s: enter setting mode

#### Setting mode:

Press **【A】** key: Short press the value minus 1. Press and hold 2s value to decrease rapidly

Press **【B】** key: Switch settings: Day → Month → Year → Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Short press the value to increase by 1, press and hold 2s to increase the value quickly

### (3) MAGRIB、ISHA、FAJR、SHUROQ、ZUHR、ASR:

Press **【B】** key for 2s: enter setting mode

#### Setting mode:

Press **【A】** key: Short press the value minus 1. Press and hold 2s value to decrease quickly

Press **【B】** key: Switch settings:Time→Alarm Time→Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Short press the value to increase by 1, press and hold 2s to increase the value quickly

Noted: 1. When setting the alarm, the settable alarm time range:1~59. When set to OFF, turn off the alarm

#### (4) Qibla direction:

Press **【D】** key until to QIBLA interface,then press **【B】** key for 2s: enter reference view status


##### Setting mode:

Press **【A】** key: Adjust direction

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Adjust direction

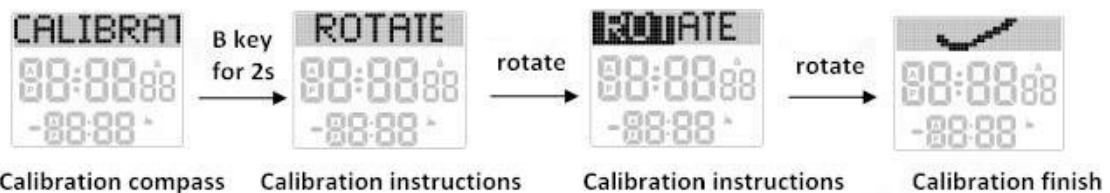

Compass calibration method:

Step 1: Enter the QIBLA mode and press B key 2s to enter the reference view state, then press D key to switch to the CALIBRATION COMPASS interface.

Step 2: Press and hold the B key to enter the compass calibration, displays ROTATE.

Step 3: Keep the watch level and rotate clockwise or anticlockwise at a constant speed. The ROTATE characters on the display interface are slowly covered.

Step 4: Until the ROTATE characters on the display interface are completely covered, the automatic exit setting indicates that the calibration is completed.

#### (5) SET TIME:

Press **【D】** key until to SET TIME interface, then press **【B】** key for 2s: enter setting mode



##### Button function:

Press **【A】** key: Short press to decrease value by 1, long press 2s to decrease value rapidly

Press **【B】** key: Switch setting item

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to increase the value by 1, long press 2s to increase value rapidly

Remarks: 1. Year setting range: 2000 ~ 2099

2. Switch to the last item and press B key to exit the setting mode. " ✓ " is displayed when exiting

#### **(6) SET SECONDS:**

Press **【D】** key until to SET SECONDS interface, then press **【B】** key for 2s: enter setting mode

##### **Setting mode:**

Press **【A】** key: Short press to decrease value by 1, long press 2s to decrease value rapidly

Press **【B】** key: Exit(confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to increase the value by 1, long press 2s to increase value rapidly

#### **(7) CITY SELECT:**

Press **【D】** key until to CITY SELECT interface, then press **【B】** key for 2s: enter setting mode

##### **Setting mode:**

Press **【A】** key: Switch countries/cities (English country names are sorted by initials A-Z in reverse sequence)

Press **【B】** key: Switch setting items: Country → City → Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Switch Countries/ cities (English country names are sorted by initials A-Z in proper order)

#### **(8) LANGUAGE SELECT:**

Press **【D】** key until to LANGUAGE SELECT interface, then press **【B】** key for 2s: enter setting mode

##### **Setting mode:**

Press **【A】** key: Switch English/Arabic

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Switch English/Arabic

#### **(9) Gregorian / HIJRI selection:**

Press **【D】** key until to CALENDAR DISPLAY interface, then press **【B】** key for 2s: enter the setting mode

##### **Setting mode:**

Press **【A】** key: Gregorian / HIJRI calendar switch

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Gregorian / HIJRI calendar switch

#### **(10) Time display:**

Press **【D】** key until to TIME DISPLAY interface, then press **【B】** key for 2s: enter the setting mode

##### **Setting mode:**

Press **【A】** key: 24H(hour,minute,second)→24H(hour,minute)→12H(hour,minute,second)

→12H(hour,minute)

Press 【B】 key: Exit (confirm)

Press 【C】 key: Measuring direction

Press 【D】 key: 24H(hour,minute,second)→12H(hour,minute)→12H(hour,minute,second)  
→24H(hour,minute)

#### **(11) Prayer time display:**

Press 【D】 key until to AZAN DISPLAY interface, then press 【B】 key for 2s: enter the setting mode

##### **Setting mode:**

Press 【A】 key: Cycle switch ALTERNATE→MINUTES AFTER →AZNA TIME

Press 【B】 key: Exit (confirm)

Press 【C】 key: Measuring direction

Press 【D】 key: Cycle switch ALTERNATE→AZNA TIME→MINUTES AFTER

#### **(12) Prayer time calculation:**

Press 【D】 key until to TAQWEEN interface, then press 【B】 key for 2s: enter the setting mode

##### **Setting mode:**

Press 【A】 key: HANAFI→ISNA→MSLM LG→UMALQURA→FIXED→EGYPT

Press 【B】 key: Exit (confirm)

Press 【C】 key: Measuring direction

Press 【D】 key: EGYPT→FIXED→UMALQURA→MSLM LG→ISNA→HANAFI

#### **(13) Safe worship time:**

Press 【D】 key until to AZAN SAFETY interface, then press 【B】 key for 2s: enter the setting mode

##### **Setting mode:**

Press 【A】 key: Short press to decrease the value by 1, press 2s to decrease the value quickly

Press 【B】 key: FAJR→SHUROQ→ZUHR→ASR→MAGRIB→ISHA→confirm settings and exit

Press 【C】 key: Measuring direction

Press 【D】 key: Short press to increase the value by 1, press 2s to increase the value quickly

Noted: 1. Setting range: -30~30

2. When the safe worship time value is set, the value will be added when the prayer time arrives (for example: Set the safe worship time value is -2, prayer time is 12:22, prayer time plus -2 is 12:20, when the time reached 12:20, it started to alarm.)

#### **(14) DST (summer time):**

Press 【D】 key until to DST SELECT interface, then press 【B】 key for 2s: enter the setting status

##### **Setting mode:**

Press 【A】 key: OFF/ON Switch

Press 【B】 key: Exit (confirm)

Press 【C】 key: Measuring direction

Press 【D】 key: OFF/ON Switch

#### **(15) ALARM mode:**

Press 【D】 key until to ALARM interface, then press 【B】 key for 2s: enter setting mode

##### **setting mode:**

Press **【A】** key: Short press to decrease the value by 1, press 2s to decrease the value quickly

Press **【B】** key: Hour → Minute → Alarm → Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to increase the value by 1, press 2s to increase the value quickly

#### **(16) STOP-W mode:**

Press **【D】** key until to STOP-W interface, then press **【B】** key for 2s: enter setting mode

##### **setting mode:**

Press **【A】** key: Reset

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: ON/OFF stopwatch

Remarks: No matter the stopwatch is running or paused, press **【A】** key to reset

#### **(17) VOLUME:**

Press **【D】** key until to VOLUME interface, then press **【B】** key for 2s: enter setting mode

##### **setting mode:**

Press **【A】** key: 1→OFF

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: OFF→1

#### **(18) Bookmark:**

Press **【D】** key until to Bookmark interface, then press **【B】** key for 2s: enter view status

##### **setting mode:**

Press **【A】** key: Short press to decrease the value by 1, press 2s to decrease the value quickly

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: Short press to increase the value by 1, press 2s to increase the value quickly

#### **(19) SHORT CUT:**

Press **【D】** key until to SHORT CUT interface, then press **【B】** key for 2s: enter setting mode

##### **setting mode:**

Press **【A】** key: TO AZAN→QURAN BOOKMARK→QIBLA→ALARM→STOP-WT

Press **【B】** key: Exit (confirm)

Press **【C】** key: Measuring direction

Press **【D】** key: ALARM→QIBLA→QURAN BOOKMARK→TO AZAN→STOP-WT

#### **(20) Electricity display:**

1. Press **【D】** key until to electricity interface, then press **【B】** key for 2s to display remaining electricity
2. In the remaining electricity display interface, then press **【B】** key will return to the electricity display interface

Synthesis:

1. In setting mode, setting item flashing display.

2. Set the time and frequency of the alarm, the volume must be turned on, or there's no alarm.