

INSTRUCTION


A. Features

- 12 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Chime hourly and Daily Alarm
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- EL backlight



B. Operational Manual

- Press B key to convert mode:

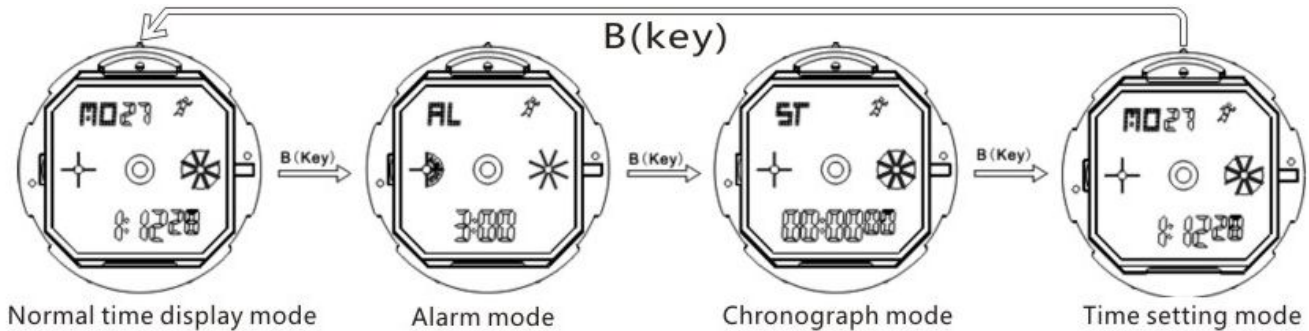

At any state ,press A key EL backlight for 3s .

Alarm Setting

- in normal display Mode, press B key once enter into Alarm Mode
- Press C key the Hours will flash, Press D key to adjust the correct hour for your Alarm.
- Press C key the Minutes will flash. Press D key to adjust the correct minutes.
- Press B key to exit.

Alarm & Chime ON/OFF

- In normal mode press B key once enter into alarm mode , press D key to ON/OFF the “ALM”/“CHI” function, Press B key to exit.

Chronograph functions

In normal display mode: press B key twice, enter Chronograph mode

- Press D to start, press D again to suspend, press D again to continue,press D to suspend again,.....when suspend,press C key back to 0:00:00.
- In Chronograph mode, press D key to start, press C key enter into split function.press C key again to get the first group record ,but the second group still processing in the back ground,press C key again to continue the second group,press C key again to read the second group record.....when the final group finished, Press D key to stop the SPL function,press C key read the final group(SUM) record, press C key again to clear the record to zero.

Time & Date Setting

In normal display Mode, Press D key to convert 12/24H

In normal Mode, press B key three times to enter setting mode and the seconds will flashing. Press D key to zero.

- Press C key the Hours will flash. Press D key to adjust correct Hours
- Press C key the Minute will flash. Press D key to adjust the correct Minutes.
- Press C key the Month will flash. Press D key to adjust correct Month
- Press C key the Date will flash. Press D key to adjust correct date
- Press C key the week will flash. Press D key to adjust the correct week.
- Press B key to exit.