


# PRADISE WATCH USER MANUAL 1206


## A. Features

- ★ 13 Digits, Hour ,Minutes ,Seconds ,Month,Day and Week
- ★ Daily Alarm ,Month&Date Alarm,and Chime hourly
- ★ 1/100 second Chronograph with split count
- ★ Second Time(DT) function
- ★ Count Down (Upper limit : 24H)
- ★ 2000----2099 Calendar, 12/24H
- ★ EL backlight

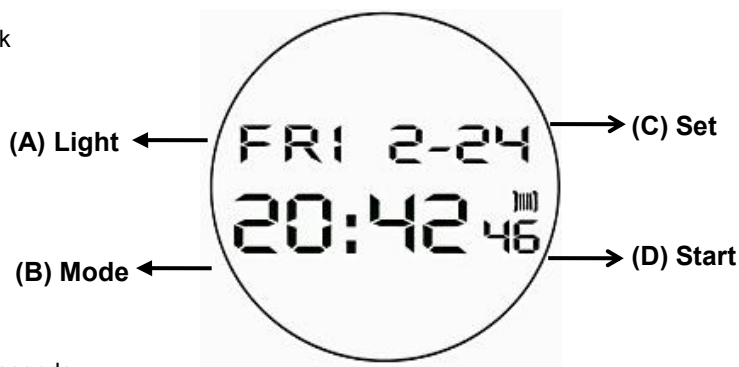

## B. Operational Manual

- ★ At any station , press A key , the EL back light on for 3 seconds.
- ★ In Normal time Mode, Press B key to convert MODE as following :

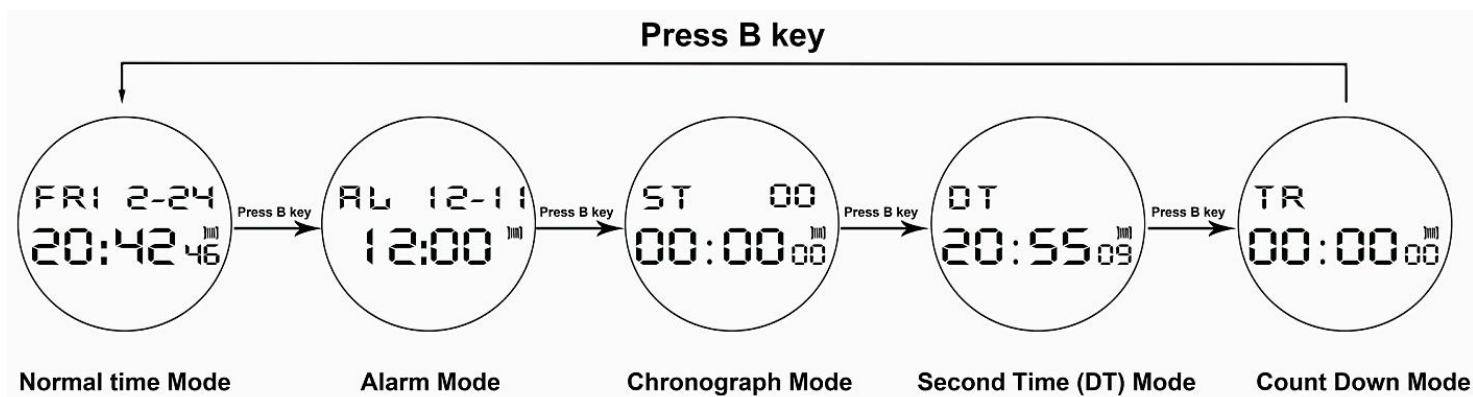

## Time & date setting

- ★ In Normal time Mode, press D key to convert 12H/24H, "P" means 12H
- ★ In Normal time Mode, Hold C key till the Minutes flashing then enter into Time&Date setting Mode
- ★ Press B to choose Hours - Minute-Year-Month-Date, Press D Key to adjust the data
- ★ Press C key to exit.

## Alarm ON/OFF

- ★ In Alarm Mode, press C key to ON/OFF Alarm function.
- ★ If "🔔" symbol appears , means ALM function ON, otherwise means OFF
- ★ When the Alarm function chiming, the symbol will flashing and chiming for 10s, press any key to stop.


## Alarm setting

- ★ In Alarm Mode, Hold C key till the alarm Hours flashing enter into Alarm setting
- ★ Press B to choose Alarm Hour -- Minute--Month--Date, Press D Key to adjust the data
- ★ When you setting the Alarm Hour, pay attention to AM/PM
- ★ When you setting the Alarm Month and Date, if you set the data of Month& Date, then on that Month& Date will alarm, if no data then means OFF the Month& Date alarm function
- ★ If you ON the Alarm function , the alarm symbol will show in each Mode
- ★ Press C to exit.

## Chronograph functions

In Normal Mode , press B key twince enter into Chronograph Mode

- ★ Press D to start, press D again to suspend, press D again to continue,press D to suspend again,.....when suspend,press C key back to 0:00:00.
- ★ In Chronograph mode, press D key to start, press C key enter into split function,and the “SPL” symbol appear,press C key again to get the first group record ,but the second group still processing in the back ground,press C key again to continue the second group,press C key again to read the second group record.....when the final group finished, Press D key to stop the SPL function,press C key read the final group(SUM) record, press C key again to clear the record to zero.

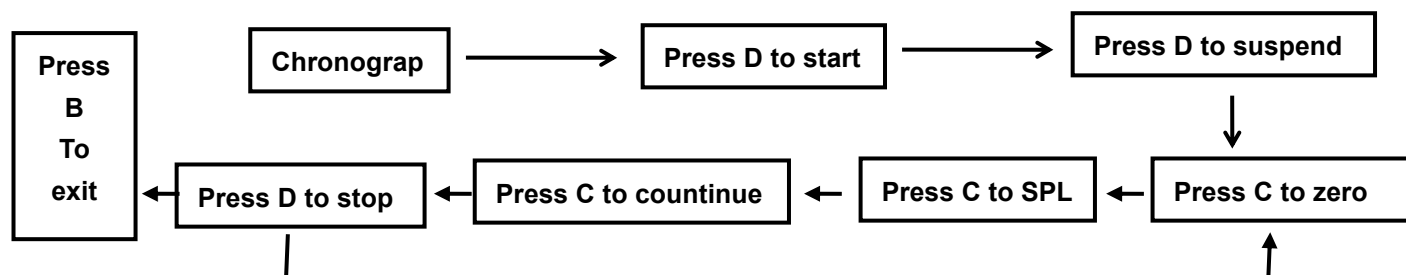

## Second Time Setting

- ★ In Second Time Mode, in the corner will show the symbol “DT”
- ★ Hold C key till the Hour flashing then enter into DT time setting Mode
- ★ Press B to choose Hours - Minute, Press D Key to adjust the data
- ★ Press C key to exit.

## Count Down Setting

- ★ In Count down Mode, in the corner will show the symbol “TR”
- ★ Hold C key till the Hour flashing then enter into TR time setting Mode
- ★ Press B to choose TR Hours - Minute, Press D Key to adjust the data
- ★ Press C key to exit the setting , press D key to start count down ,press D key again to suspend, press D key again to start again
- ★ After you suspend the count down, press C key to stop count down function back to the count down time which you setting
- ★ After you start the count down, press M back to Normal Time Mode, and the count down working on the background.
- ★ Count down time could be setting between 1 minutes to 24H,if you wanna to setting the count down time setting in 24H, then setting the count down time in 0:00:00
- ★ After you finished the count down to 0:00:00, the watch will chime for 15s,press any key to stop chime and back to the count down time which you setting .